CITY OF KELOWNA

MEMORANDUM

Date: February 05, 2018

File No.: Z18-0011

To: Community Planning (TA)

From: Development Engineering Manager (JK)

Subject: 1193 St. Paul St.,



I4&P1 to C7

The Development Engineering Department has the following comments and requirements associated with this rezoning application. The road and utility upgrading requirements outlined in this report will be a requirement of this development. The Development Engineering Technologist for this project is Jason Angus

1. Domestic Water and Fire Protection

- a. This property is currently serviced with a 13mm-diameter water service. The developer's consulting mechanical engineer will determine the domestic, fire protection requirements of this proposed development and establish hydrant requirements and service needs. The applicant will arrange for the removal and disconnection of the existing service and the installation of one new larger service at the applicants cost.
- b. A water meter is mandatory for this development and must be installed inside the building on the water service inlet as required by the City Plumbing Regulation and Water Regulation bylaws. The developer or building contractor must purchase the meter from the City at the time of application for a building permit from the Inspection Services Department, and prepare the meter setter at his cost.
- c. The developer must obtain the necessary permits and have all existing utility services disconnected prior to removing or demolishing the existing structures. The City of Kelowna water meter contractor must salvage existing water meters, prior to building demolition. If water meters are not salvaged, the developer will be invoiced for the meters

2. Sanitary Sewer

a. Our records indicate that this property is currently serviced with a 100mmdiameter sanitary sewer service. The applicant's consulting mechanical engineer will determine the requirements of the proposed development and establish the service needs. Only one service will be permitted for this development. If required, the applicant will arrange for the removal and disconnection of the existing service and the installation of one new larger service at the applicants cost.

3. Storm Drainage

a. The developer must engage a consulting civil engineer to provide a storm water management plan for the site, which meets the requirements of the City Storm

Water Management Policy and Design Manual. The storm water management plan must also include provision of lot grading plan, minimum basement elevation (MBE), if applicable, and recommendations for onsite drainage containment and disposal systems.

- b. On site storm drainage systems for the site will be reviewed and approved by Engineering when a site servicing design is submitted.
- c. There is a possibility of a high water table or surcharging of storm drains during major storm events. This should be considered in the design of the onsite system.

4. Road Improvements

- a. St. Paul St. fronting this development site has been urbanized. No further upgrades are needed at this time.
- b. Clement Ave fronting this development site has been urbanized. No further upgrades are needed at this time

5. Road Dedication and Subdivision Requirements

- a. Grant Statutory Rights of Way if required for utility services.
- b. If any road dedication or closure affects lands encumbered by a Utility right-ofway (such as Hydro, TELUS, Gas, etc.) please obtain the approval of the utility. Any works required by the utility as a consequence of the road dedication or closure must be incorporated in the construction drawings submitted to the City's Development Manager
- c. All access to the development will be from St Paul Street.

6. Electric Power and Telecommunication Services

- a. All proposed service connections are to be installed underground. It is the developer's responsibility to make a servicing application with the respective electric power, telephone and cable transmission companies to arrange for these services, which would be at the applicant's cost
- Re-locate existing utilities, where necessary

7. Design and Construction

- a. Design, construction supervision and inspection of all off-site civil works and site servicing must be performed by a Consulting Civil Engineer and all such work is subject to the approval of the City Engineer. Drawings must conform to City standards and requirements.
- b. Engineering drawing submissions are to be in accordance with the City's "Engineering Drawing Submission Requirements" Policy. Please note the number of sets and drawings required for submissions.
- c. Quality Control and Assurance Plans must be provided in accordance with the Subdivision, Development & Servicing Bylaw No. 7900 (refer to Part 5 and Schedule 3).
- d. A "Consulting Engineering Confirmation Letter" (City document 'C') must be completed prior to submission of any designs.



Α

e Refore any construction related to the requirements of this subdivision application

8. Servicing Agreements for Works and Services

- a. A Servicing Agreement is required for all offsite works and services on City lands in accordance with the Subdivision, Development & Servicing Bylaw No. 7900. The applicant's Engineer, prior to preparation of Servicing Agreements, must provide adequate drawings and estimates for the required works. The Servicing Agreement must be in the form as described in Schedule 2 of the bylaw.
- b. Part 3, "Security for Works and Services", of the Bylaw, describes the Bonding and Insurance requirements of the Owner. The liability limit is not to be less than \$5,000,000 and the City is to be named on the insurance policy as an additional insured.

9. <u>Geotechnical Study</u>

- (a) Provide a geotechnical report prepared by a Professional Engineer competent in the field of hydro-geotechnical engineering to address the items below: NOTE: The City is relying on the Geotechnical Engineer's report to prevent any damage to property and/or injury to persons from occurring as a result of problems with soil slippage or soil instability related to this proposed subdivision. The Geotechnical reports must be submitted to the Development Services Department for distribution to the Development Engineering Branch and Inspection Services Division prior to submission of Engineering drawings or application for subdivision approval:
 - i. Area ground water characteristics, including any springs and overland surface drainage courses traversing the property. Identify any monitoring required.
 - ii. Site suitability for development.
 - iii. Site soil characteristics (i.e. fill areas, sulphate content, unsuitable soils such as organic material, etc.).
 - iv. Any special requirements for construction of roads, utilities and building structures.
 - v. Recommendations for items that should be included in a Restrictive Covenant.
 - vi. Recommendations for roof drains, perimeter drains and septic tank effluent on the site.
 - vii. Any items required in other sections of this document.

Additional geotechnical survey may be necessary for building foundations, etc







View from St Paul Street/Clement Avenue

July 22, 2020

01










View from Clement Avenue

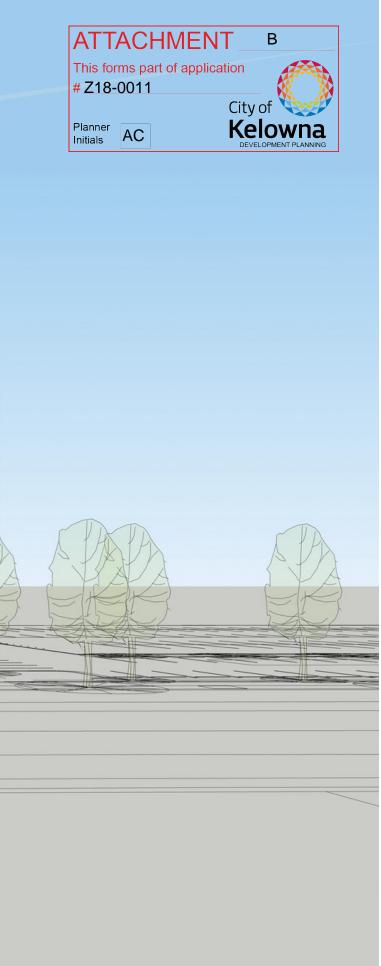

July 22, 2020

03





View from RCMP parking lot







View from RCMP parking lot







View from RCMP parking lot

06